

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 October 2003 (16.10.2003)

PCT

(10) International Publication Number
WO 03/085733 A1

(51) International Patent Classification⁷: **H01L 23/373**

(21) International Application Number: **PCT/US03/09907**

(22) International Filing Date: **1 April 2003 (01.04.2003)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
2002-100200 **2 April 2002 (02.04.2002) JP**

(71) Applicant (for all designated States except US): **3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).**

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TAKEDA, Masaaki [JP/JP]; 4-16-8-303, Yabe, Sagami-hara-city, Kanagawa 229-0032 (JP). MITSUI, Akihiko [JP/JP]; 32-42-2-301,**


Akebono-cho 1-chome, Tachikawa-city, Tokyo 190-0012 (JP). **KAWATE, Kohichiro [JP/JP]; 8-13-12, Tamagawagakuen, Machida-city, Tokyo 194-0041 (JP). ISHII, Shigeyoshi [JP/JP]; 2392-6, Kobiki-machi, Hattouji-city, Tokyo 193-0934, Tokyo 193-0934 (JP).**

(74) Agents: **FLORCZAK, Yen Tong et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).**

(81) Designated States (national): **AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**

[Continued on next page]

(54) Title: **THERMOSETTING ADHESIVE SHEET WITH ELECTROCONDUCTIVE AND THERMOCONDUCTIVE PROPERTIES**

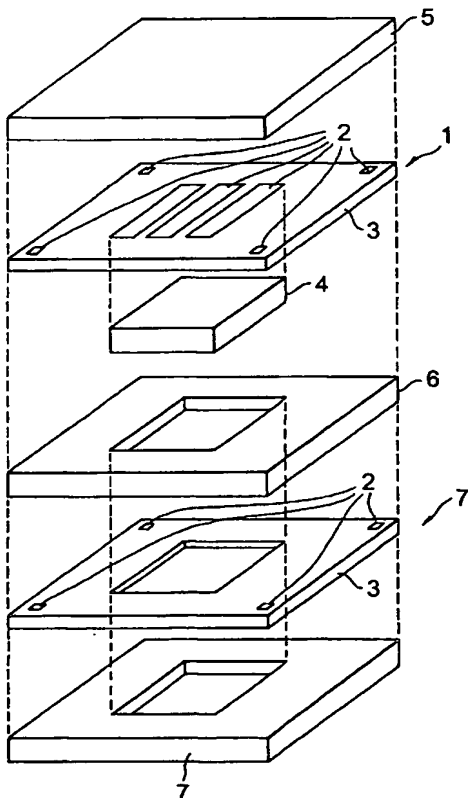

(57) Abstract: A thermosetting adhesive sheet with electroconductive and thermoconductive properties, which comprises a thermosetting adhesive sheet composed of a thermosetting adhesive composition comprising an ethylene-glycidyl (meth)acrylate copolymer and a carboxyl group-containing rosin, where crosslinking is formed between the ethylene of the copolymer by electron beam radiation, and having at least one through-opening region formed at a prescribed location, and further including a low melting point solder placed within said through-opening region(s) formed at the prescribed location(s).

WO 03/085733 A1